



AXELEN

Est 1990

Grande protection de la colonne

Axelent propose une protection de colonne plus large pour une protection plus flexible des colonnes plus grandes. Cette protection convient aux colonnes carrées de 400 mm de côté en standard. Des remplissages sont également disponibles pour étendre la protection jusqu'à 1000 mm de côté. La protection de colonne est fabriquée en polyéthylène basse densité, ce qui lui confère une grande flexibilité et une grande résistance.



Modèles

ARTICLES / DESCRIPTION	LARGEUR (MM)	HAUTEUR (MM)
 AG-CP400 RAL 1003	200	1080
 AG-CP4-250IN Infill, RAL 1003	250	
 AG-CP4-110IN Infill, RAL 1003	110	

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Hand Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic

4 connection sides

Width:

200 mm

7 7/8"

Height:

350 -

1160 mm

13 13/16" -

45 11/16"



Essential

2 connection sides

Width:

132 mm

5 3/16"

Height:

620 -

1170 mm

24 7/16" -

46 1/16"



X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.



1 5250 J




2 4500 J




3 6200 J



4 7700 J




5 7000 J



6 5000 J



7 6700 J



8 8000 J



9 8300 J



10 0 J



11 1800 J



12 3000 J



13 1500 J



14 1700 J




15 2250 J



16 3100 J

1. Bollards
2. Impact
3. Impact High
4. Double Impact Low
5. Double Impact High
6. Pedestrian
7. Pedestrian + Impact
8. Pedestrian + Impact High
9. Pedestrian + Double Impact
10. Pedestrian Gate
11. Column Guard
12. Floor Barrier*
13. Essential Bollards
14. Essential Pedestrian 2 rail
15. Essential Pedestrian
16. Essential Pedestrian + Impact High

* The Floor Barrier can be used in combination with configurations: 3, 6, 8 & 9

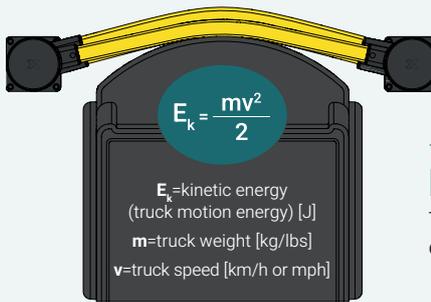

Impact testing

This is how we calculate the energy from a vehicle impact.



Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J



Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J



Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J

Component Colours

● RAL 1018 ● RAL 9011

Operating temperature

-10°C → 40°C

