

Essential Pedestrian with Impact High

The X-Protect Essential Pedestrian with Impact High Barrier offers reinforced protection in busy traffic zones. Designed to handle low-level impacts, it separates pedestrians from vehicles while maintaining strong, flexible barrier performance.



The Essential Pedestrian with Impact High Barrier provides reinforced safety for walkways exposed to medium-duty vehicles and frequent ground-level impacts. Designed for combined strength and flexibility, it separates pedestrians from vehicles while absorbing impact energy at the base to minimise damage and maintain barrier integrity.

For areas with intensive material handling, the Floor Barrier adds an extra layer of protection. Positioned at ground level, it ensures a clear division between pedestrian and vehicle routes, preventing contact with vehicle forks, low pallets or stray objects. Acting as a robust foundation, it complements the higher structure by distributing impact forces efficiently and maintaining safe, predictable traffic patterns throughout the facility.

Installation is fast and straightforward, with minimal fixings and a design that protects the floor surface during both setup and maintenance.

Key feature

- Fast to install
- Kind to the floor
- Easy to repair

Impact test results					
Area of impact	Load	Equivalent to	90° Deflection	Force to fixings	
Centre of barrier C - C as below					
2000mm	3100 J	2500kg 5.7 km/h	1500kg 7.3 km/h	295mm	5.7kN
Posts					
End post	1500 J	2500kg 3.9 km/h	1500kg 5 km/h	500mm	3.2kN
Mid post	1500 J	2500kg 3.9 km/h	1500kg 5 km/h	450mm	3.3kN

Modèles

Posts 3 articles

ARTICLES / DESCRIPTION	HAUTEUR (MM)	LONGUEUR (MM)	CC (MM)	AUTRE
 BCC0-116-I1P2-E2 Corner post	1160		2000	
 BEE0-117-I1P2-A1 End post	1170		2000	Compatible with the Floor Barrier
 BEM0-117-I1P2-A1 Mid post	1170		2000	Compatible with the Floor Barrier

Impact rails 7 articles

ARTICLES / DESCRIPTION	HAUTEUR (MM)	LONGUEUR (MM)	CC (MM)	AUTRE
 RCI1-027-0050 Impact rail		270	500	
 RCI1-047-0070 Impact rail		470	700	
 RCI1-077-0100 Impact rail		770	1000	

	RCI1-127-0150 Impact rail	1270	1500
	RCI1-177-0200 Impact rail	1770	2000
	RCI1-227-0250 Impact rail	2270	2500
	RCI1-277-0300 Impact rail	2770	3000

Hand rails 5 articles

ARTICLES / DESCRIPTION	HAUTEUR (MM)	LONGUEUR (MM)	CC (MM)	AUTRE
	RCP1-027-0050 Hand rail	270	500	
	RCP1-047-0070 Hand rail	470	700	
	RCP1-077-0100 Hand rail	770	1000	
	RCP1-127-0150 Hand rail	1270	1500	
	RCP1-177-0200 Hand rail	1770	2000	

Produits associés

X-PROTECT

Floor Barrier



Conçue pour servir de solution autonome, elle améliore la protection des périmètres des bâtiments et des infrastructures contre les risques quotidiens liés aux fourches des véhicules, aux palettes...

17 articles

X-Protect is **Safe**

- ✓ Our impact protection products undergo rigorous testing at our state-of-the-art testing facility.
- ✓ With decades of experience in industrial safety, we've designed our impact protection to perform effectively in real-world conditions.
- ✓ We know safety and can guide you to the best solutions tailored to your specific needs.




X-Protect is **Modular**

- ✓ Quickly modify barrier specifications with minimal waste.
- ✓ Perform easy and cost-effective repairs at a component level.
- ✓ Quickly build strong integrated installations with few parts.



X-Protect is **Sustainable**

- ✓ Simple end of life dis-assembly, even after an accident.
- ✓ Single material components that are easy to recycle.
- ✓ Repairable by design, damaged or worn components are easily replaced extending the barrier's life.

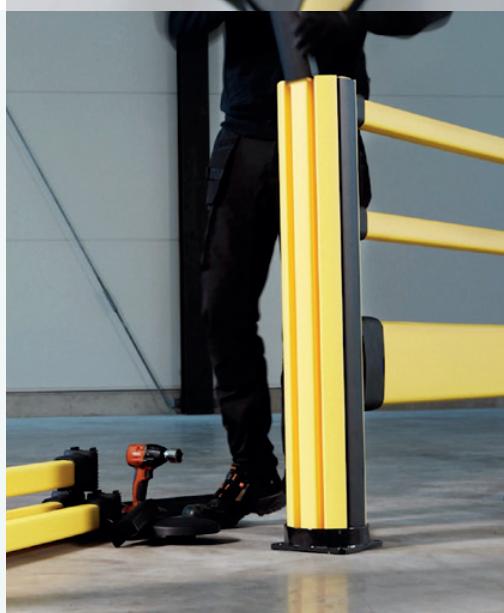

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Hand Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Height:
350 - 1160 mm
13 13/16" -
45 11/16"

Width:
200 mm
7 7/8" in



Component Colours



RAL 1018




RAL 9011

X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*



* The highest force depends on the C-C. More information is available upon request.

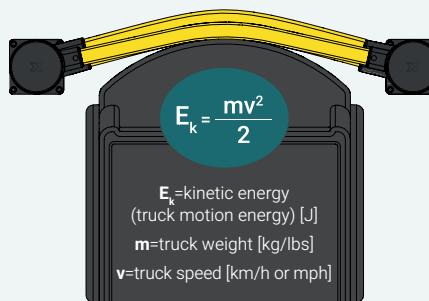

Impact testing

This is how we calculate the energy from a vehicle impact.



Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J




Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J



Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J


Operating temperature



Assembly



SCAN THE CODE TO
DOWNLOAD OUR
ASSEMBLY MANUALS

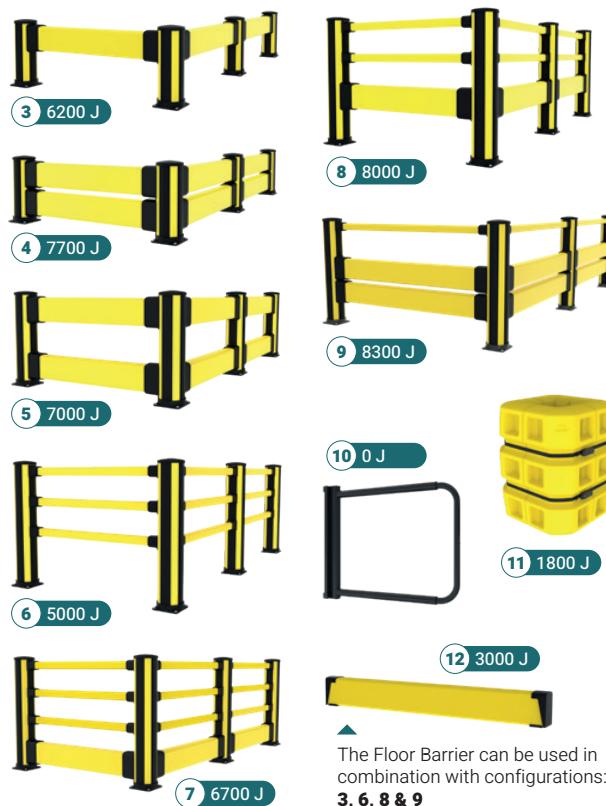

1. Bollards
2. Impact
3. Impact High
4. Double Impact Low
5. Double Impact High
6. Pedestrian
7. Pedestrian + Impact
8. Pedestrian + Impact High
9. Pedestrian + Double Impact
10. Pedestrian Gate
11. Column Guard
12. Floor Barrier

The Floor Barrier can be used in combination with configurations:
3, 6, 8 & 9